



**REBA 65 EXT L2540 W**  
**REBA 65 INT L2524 SYM BLINE HF K3 840 HO**  
 ALUMINIUM PROFILE SYSTEMS

**90522L0090W0000**  
**90501L009EW3000**

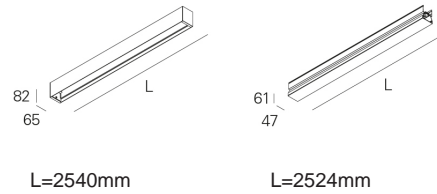

**Light distribution**



**PRODUCT DESCRIPTION**

**Application Areas:** Offices, Hotels and residential, Public spaces, Retail, Education, Health and care

**Mounting Type:** Surface mounted, Suspended

**Control Gear Included:** Yes

**Control Gear:** LED driver 220-240VAC-50/60Hz

**Ingress Protection (IP):** 40

**Ambient Temperature Range (°C):** ]5, 25[

**Warranty (Years):** 5

**Body Material:** Extruded aluminium profile

**Finishing:** Epoxy polyester powder coated

**REBA 65 EXT L2540 W**

**CHARACTERISTICS**

**Luminaire Type:** Straight line luminaire

**Luminaire Module:** Individual

**Current Supply Cable Entry Point:** Back

**MATERIALS**

**Colour:** White (W)

**Glow-wire Resistance (°C):** 960

**OPTICAL SYSTEM**

**Optical System:** bLINE - Opal diffuser

**Light Distribution:** Direct

**Beam Angle (°):** 104

**MATERIALS**

**Body Material:** Extruded aluminium profile

**Finishing:** Epoxy polyester powder coated

**Colour:** White (W)

**DIMENSIONS**

**L - Length (mm):** 2540

**W - Width (mm):** 65

**H - Height (mm):** 82

**Net Weight (kg):** 3.17

**TECHNICAL DATA**

**Light Source:** LED

**Input Power (W):** 65

**Input Driver Voltage:** 220-240V-50/60Hz

**Power Factor (λ):** 0,94

**Luminaire Luminous Flux (lm):** 7564

**Luminaire Efficacy (lm/W):** 116

**Emergency Unit:** 3

**Unified Glare Rating (UGR):** <25

**LED Lifetime - Rated Median Useful Life:** 80.000h @ L90, B10, Ta 25°C

**CCT - Correlated Colour Temperature (K):** 4000

**Colour Rendering Index (CRI):** >80

**Chromaticity Tolerance (MacAdam step):** <3

**This Product Contains a Light Source of Energy Efficiency Class:** A

**LED Module Forward Voltage Range (VF):** 32,2

**Power Supply Dimming:** ON/OFF

**Maximum of Luminaires by Magnetic Circuit Breaker B16:** <12

**REBA 65 INT L2524 SYM BLINE HF K3 840 HO**

**CHARACTERISTICS**

**Luminaire Type:** Straight line luminaire

**Luminaire Module:** Individual, Middle (MID), Start / End (SRT/END)

**Insulation Class:** I

**REBA 65 EXT L2540 W**  
**REBA 65 INT L2524 SYM BLINE HF K3 840 HO**  
ALUMINIUM PROFILE SYSTEMS

**90522L0090W0000**  
**90501L009EW3000**

---

**Inrush Current (A):** 24  
**Pulse Duration (µs):** 194

#### **DIMENSIONS**

**L - Length (mm):** 2524  
**W - Width (mm):** 62  
**H - Height (mm):** 71  
**Net Weight (kg):** 4.28

#### **NOTES**

• For suspended version it is necessary to order the suspension, the current supply cable and the ceiling rose. Please order separately.